

data sheet

Colenta[®]

FILM Processor

20 E6 14 Eco



Colenta[®]

E6 Processor options for sheet and roll film
up to 20cm in width

09/2004 AN



E6 Film Processor

TYPE:COLENTA 20 E6 14 Eco

Technical Specifications:

Processing applications:	E6 film roll, sheet, aerial, 35mm
Max. Process width:	max. 20 cm - 8 inch (3 Track loading of 35mm film)
Microprocessor Control:	with 4 preprogrammable processing cycles

Transport Speed: 20 E6 14 - 14cm/ 5,5 inch per minute (at 6 min Dev.Time)

(Dev. times are pre-programmable for push-pull processing)

Tank capacities: 20 E6 14 Eco

First Developer	:	11,5
Wash	:	5,5
Reversal	:	5,5
Color Developer	:	11,5
Conditioner	:	5,5
Bleach	:	11,5
Fix	:	8,0
Wash 2	:	8,0
STAB	:	5,5

Replenishment: - Precisely controlled using opto-sensors to measure the film area loading.
- Activated after a pre-programmed film area is fed into the processor
- Antioxidation/standby replenishment, activated after 0-9 hours *

Solution Levels: Low Level monitoring in all tanks *
High Level monitoring in Overflow/Collection Tanks (waste management, optional) *
Low Level in Repl. Tanks for FD, CD, Bleach, Fix and Stabi (optional) *

Temperatures: High / Low level monitoring for all the wet-tanks

Work in Progress : Details the location of film within the processor.


Transport: Drive motor overload monitoring
Security cover lid switch

(* optional) - when activated will operate an audible warning and a message alert to confirm the error type.

Technical specification subject to change without notice.




Transport System:

COLENTA 20 E6 14 Eco

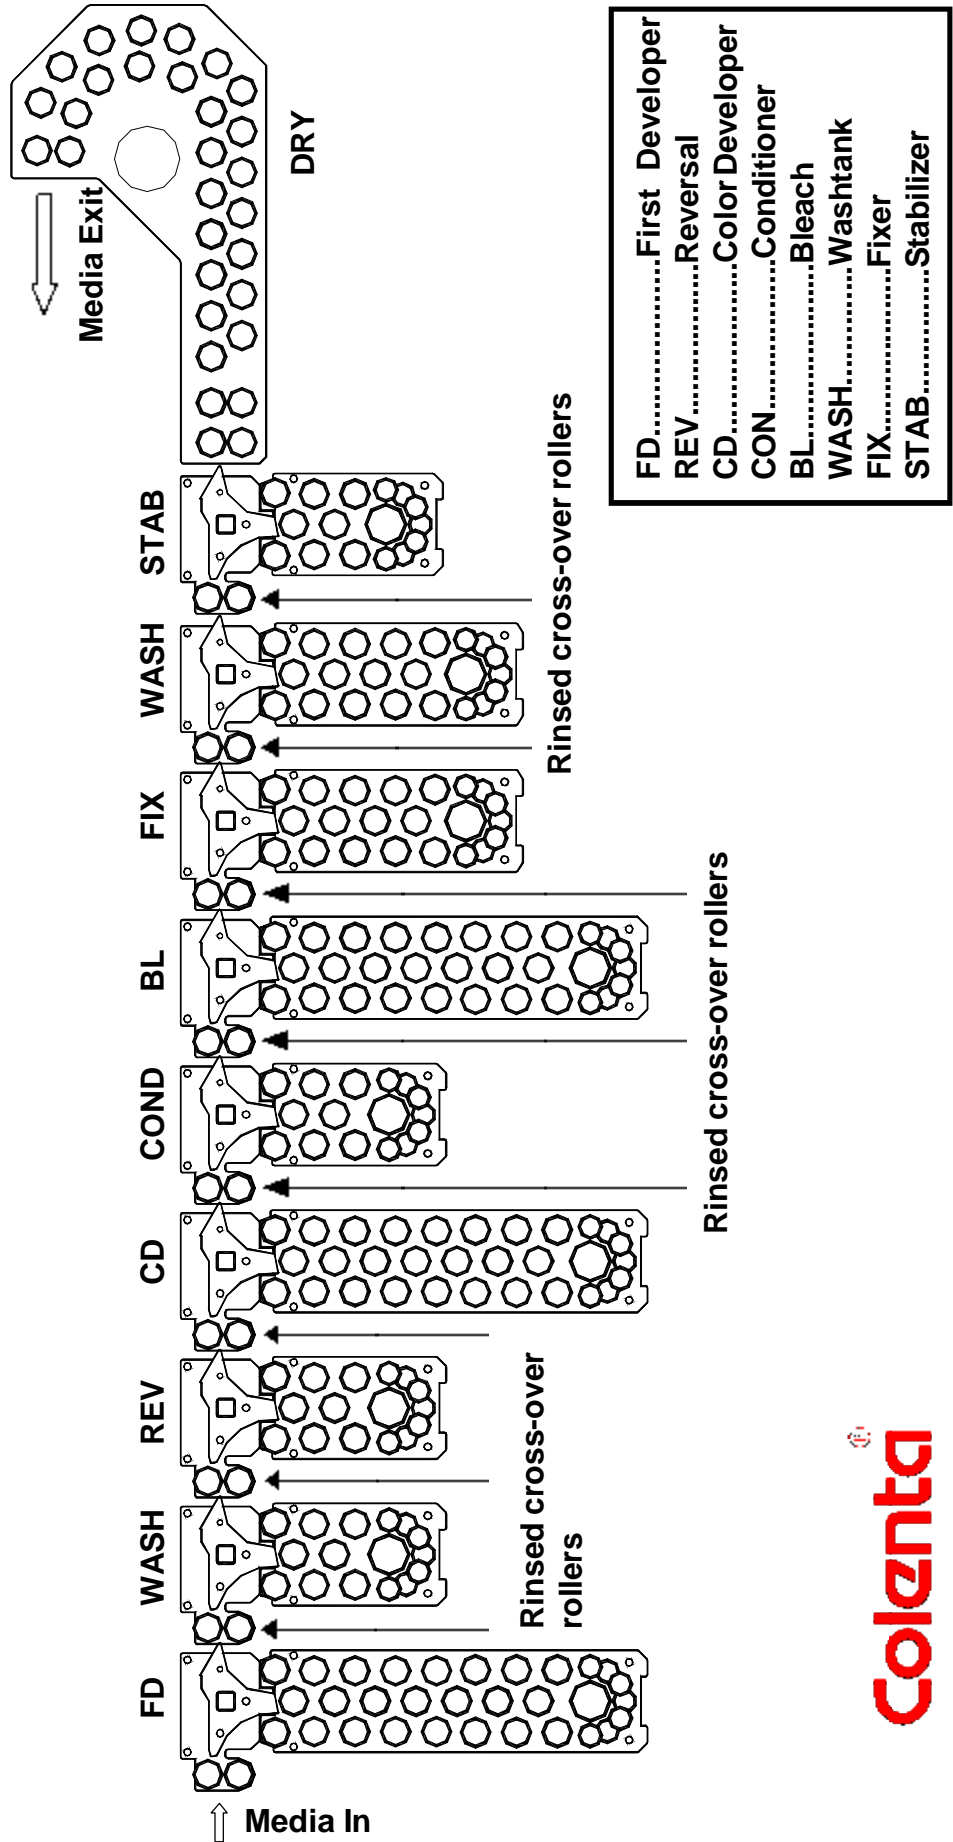

DIMENSIONS for:

COLENTA 20 E6 14 Eco

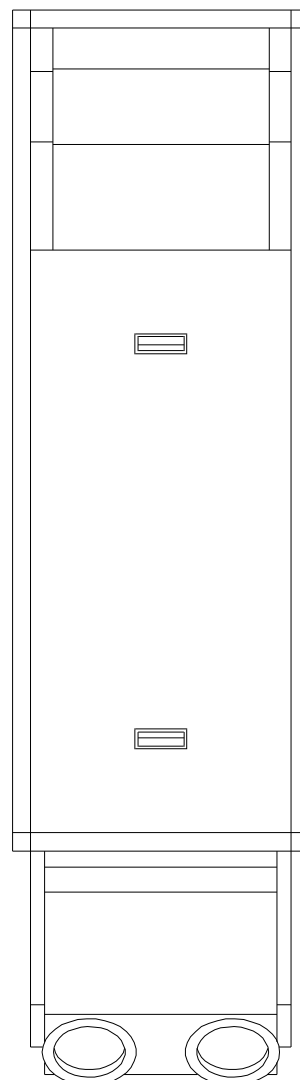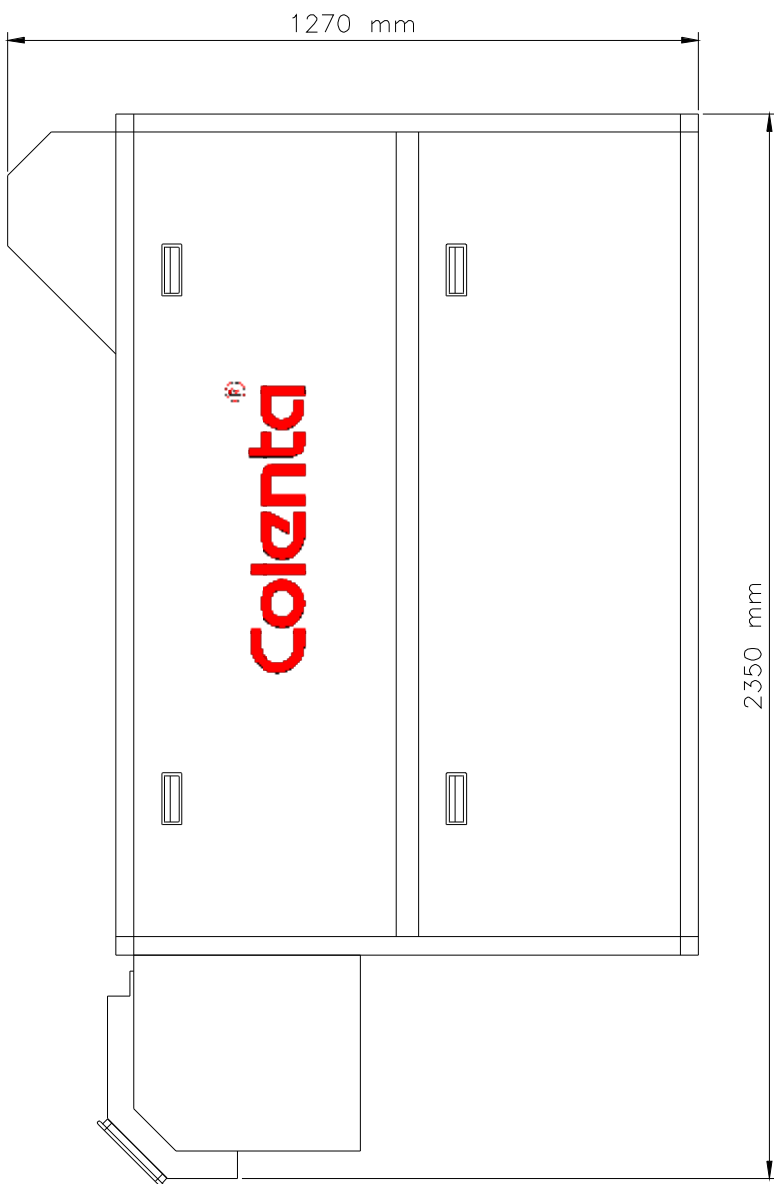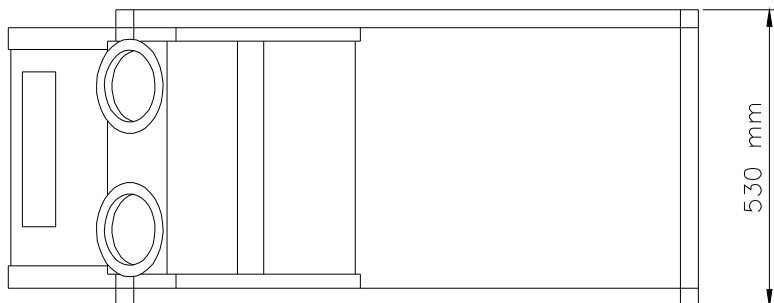


We recommend a minimum walking space of 60cm around the processor.

Electrical supply: (Standard, when 3N~400/230V, 50/60 Hz supply available)

20 E6 14 Eco

**3,2 kW
16 A**

ATTENTION:
PROCESSOR TO BE CONNECTED TO
SUPPLY NET: 3N~380/220V 50/60Hz

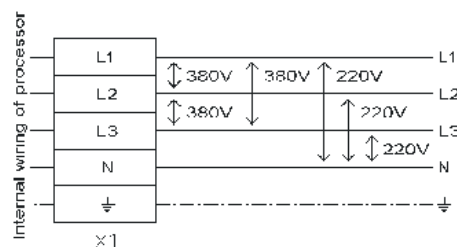

In case the above voltages are not available at site, please contact your local dealer or the factory for rewiring advice.

Alternatives, to be indicated when ordering

Details for shipment:

20 E6 14 Eco

packing dimensions: 1 wooden box on palette
240cm x 70cm x 150cm (L x W x H)
packing volume: 2,52 m³
weight with packing: 370 kg